

SHOP LIGHT –SINGEL TUBE



LED NA-SL SERIES



3200lm



4000lm




5000lm

CONSTRUCTION:

- White coloured polycarbonate body
- Opal polycarbonate diffuser

FEATURES:

- Damp Location
- 2*12" Hanging Chains with Hook
- 7.5" ON/OFF Pull Chains
- Powered by 5ft. 18/2 SPT-2 Cord
- Pro-diffuser providing higher photometric performance than LED tubes and low glare lighting
- Wide operating ambient temperature range of -4°F to 113°F

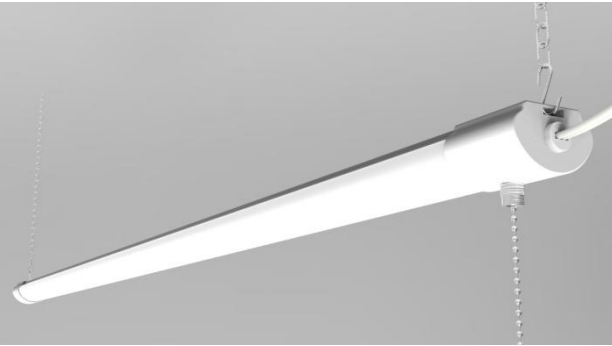


WARRANTY




RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE




SAFE CLASS

Model No.	Dimension
WR-SLN03-32W	2in*46.26in*1.3in 51mm*1175mm*33mm
WR-SLN03-40W	
WR-SLN03-50W	

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- 12" Hanging Chains with Hooks x2

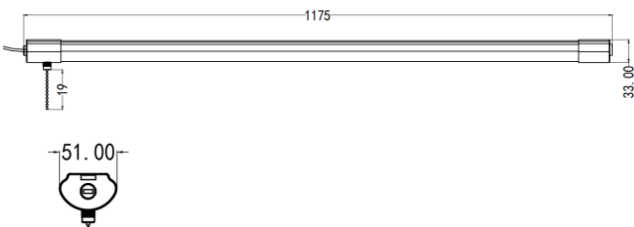

Notes:

4000lm&5000lm Linkable

A maximum of 4&5(200W) units can be linked together, With a maximum distance of 1 foot between each light