

DOUBLE TRIMS FLUSH MOUNT




LED NA-CL SERIES



750lm

1150lm

1450lm

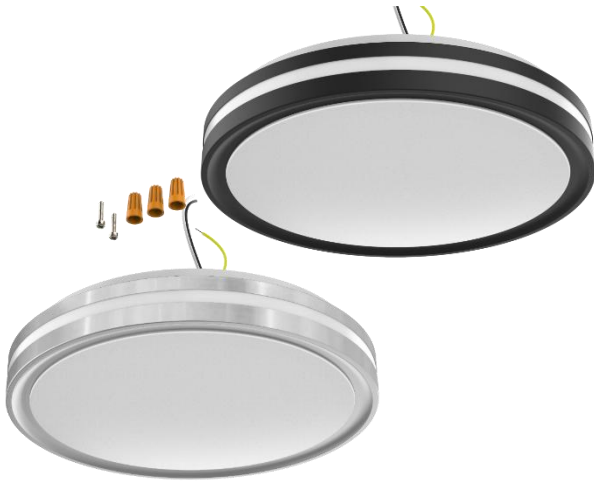

CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F




WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN04-15W15P	Φ10.3*2.5	Φ260*64.5mm
WR-CLN04-21W/21P	Φ13*2.6	Φ331.6*66.5mm
WR-CLN04-25W/25P	Φ15*2.8	Φ381.2*70.5mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)(SLR)	CCT	CRI
WR-CLN04-15W	10"	15	750	5CCT	80/90
WR-CLN04-21W	13"	21	1150	5CCT	80/90
WR-CLN04-25W	15"	25	1450	5CCT	80/90
WR-CLN04-15P	10"	10/12/15	400/540/750	5CCT+3WATTAGE	80/90
WR-CLN04-21P	13"	15/18/21	750/950/1150	5CCT+3WATTAGE	80/90
WR-CLN04-25P	15"	21/23/25	1150/1300/1450	5CCT+3WATTAGE	80/90