

IP65 BATTEN LIGHT-LE6858



LED LE SERIES


20W

2400lm

40W

5500lm

NEW!

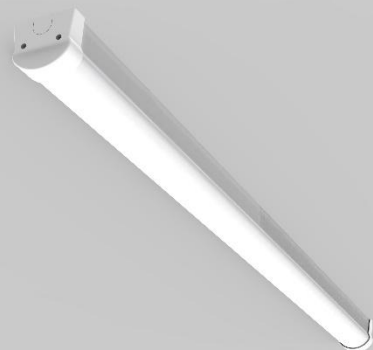

CONSTRUCTION:

- White coloured Full PC body

FEATURES:

- Fix the batten before wiring, one-handed operation and quick installation.
- Adequate space for wires
- Terminals are reserved for connection of up to 24,000 lumens.
- Luminous Efficacy is up to 140 lm/W
- Linkable function
- 3CCT + 3 Multi-Wattage adjustable

3

YRS

WARRANTY

25,000

HRS

RATED HOURS

IP65

IP RATING

220-

240

VAC

OPERATING VOLTAGE

3000K

4000K

5000K

CCT3



130

BEAM ANGLE



MULTI WATTAGE

MULTI-WATTAGE

Model No.

Dimension

WR-LE6858-20W-CCT

600*68*58

WR-LE6858-40W-CCT

1200*68*58



ACCESSORIES

ST3.5*25 screws x2

Expansion Plug x2

Waterproof gasket x2

Clips x2

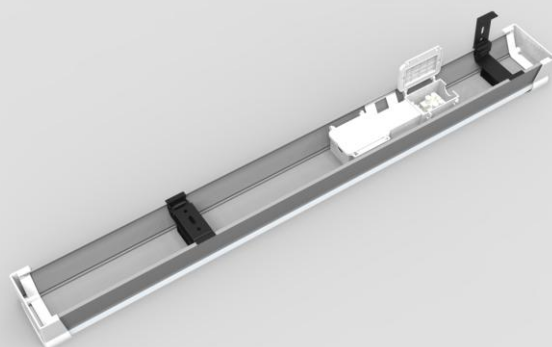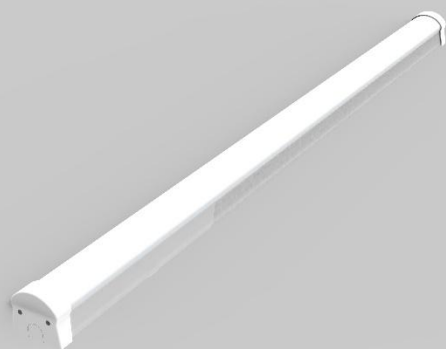

IP65 BATTEN LIGHT-LE6858

LED LE SERIES



20W

40W

Standard
CCT

WR-LE6858-20W
WR-LE6858-20W-CCT

WR-LE6858-40W
WR-LE6858-40W-CCT

Total Power (W):

20

40

Total Light Output (lm):

2400

5500

Efficacy (lm/cctW):

120

140

Beam Angel (deg):

120

120

CRI (Ra):

>80, sdc<6

>80, sdc<6

CCT (K):

3000/4000/5000K

3000/4000/5000K

Power Factor (PF):

>0.5

>0.9

BOX Size(mm):

610*75*60

1210*75*60

Master CTN QTY:

20

20

Carton Size(mm):

625*320*330

1225*320*330

CTN (CBM)

0.07

0.13

IP44 BATTEN LIGHT-LE4525




LED LE SERIES



2000lm



4000lm

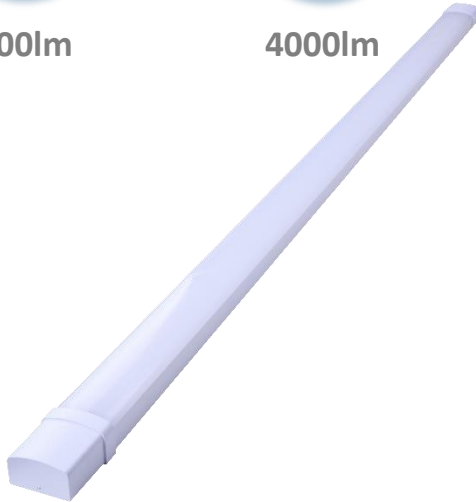

CONSTRUCTION:

- White coloured Full PC body

FEATURES:

- IP44
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 55MM and SLIM WIDTH OF ONLY 55MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-LE4525-20W	600*45*25
WR-LE4525-40W	1200*45*25

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-LE4525-20W	20W	2000	650*53*32	20	66.5*23*19
WR-LE4525-40W	40W	4000	1250*53*32	20	126.5*23*19

IP44 BATTEN LIGHT-LE5530



LED LE SERIES



2000lm



4000lm



CONSTRUCTION:

- White coloured Full PC body

FEATURES:

- IP44
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 55MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-LE5530-20W	600*55*30
WR-LE5530-40W	1200*55*30

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-LE5530-20W	20W	2000LM	650*63*36	20	66.5*27*21
WR-LE5530-40W	40W	4000LM	1250*63*36	20	126.5*27*21

IP44 BATTEN LIGHT-LE6045



LED LE SERIES



2000lm



4000lm



CONSTRUCTION:

- White coloured Full PC body

FEATURES:

- IP44
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 60MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-LE6045-20W	600*60*45
WR-LE6045-40W	1200*60*45

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-LE6045-20W	20W	2000LM	650*68*52	20	66.5*29*29
WR-LE6045-40W	40W	4000LM	1250*68*52	20	126.5*29*29

IP44 BATTEN LIGHT-LE6525



LED LE SERIES



20W

2000lm



40W

4000lm



CONSTRUCTION:

- White coloured Full PC body

FEATURES:

- IP44
- EASY INSTALLATION
- SLIM THICKNESS OF ONLY 25MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-LE6525-20W	600*65*25
WR-LE6525-40W	1200*65*25

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-LE6525-20W	20W	2000LM	610*73*32	20	62.5*31*19
WR-LE6525-40W	40W	4000LM	1210*73*32	20	122.5*31*19

TRIPROOF LIGHT-TPD



LED LE SERIES



20W

2000lm



40W

4000lm



CONSTRUCTION:

- White coloured Full PC body

FEATURES:

- CENTRAL/SIDE HOLE FOR WIRE
- IK08 AND IP65 RATING
- DURABLE UV STABILIZED PC
- STAINLESS STEEL CLIPS (301 chrome-nickel)
- 3CCT DIP on Switch
- EMERGENCY LiFePO4 backup battery available



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-TPD-18W-CCT	600*75*72
WR-TPD-36W-CCT	1200*75*72
WR-TPD-45W-CCT	1500*75*72

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Waterproof gasket x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-TPD-18W-CCT	18W	1800LM	610*90*80	10	62.5*43.5*20
WR-TPD-36W-CCT	36W	3600LM	1210*90*80	10	122.5*43.5*20
WR-TPD-45W-CCT	45W	4500LM	1510*90*80	10	152.5*43.5*20

SLIM BATTEN LIGHT-BT01/LN



LED BT SERIES



2160lm

4320lm

5400lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- AU/EU EDITION
- EASY INSTALLATION
- IK06
- SLIM WIDTH OF ONLY 75MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-BT01-18W-01 (WR-LN-18W)	600*75*25
WR-BT01-36W-01 (WR-LN-36W)	1200*75*25
WR-BT01-45W-01 (WR-LN-45W)	1500*75*25

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT01-18W-01	18W	2160LM	610*85*30	20	62*34*19
WR-BT01-36W-01	36W	4320LM	1210*85*30	10	122*17*19
WR-BT01-45W-01	45W	5400LM	1510*85*30	10	152*17*19

SLIM BATTEN LIGHT-BT02



LED BT SERIES



2000lm



4000lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- ECO EDITION
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 60MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-BT02-20P-01	610*60*25
WR-BT02-40P-01	1210*60*25

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT02-20P-01	20W	2000LM	610*82*31	10	62*17.5*19
WR-BT02-40P-01	40W	4000LM	1210*82*31	10	122.5*17.5*19

SLIM BATTEN LIGHT-BT03



LED BT SERIES

16W

1280lm

32W

2560lm



CONSTRUCTION:

- White coloured Full PLASTIC body

FEATURES:

- ECO EDITION
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 120MM

1
YR

WARRANTY

25,000
HRS

RATED HOURS

IP20

IP RATING

100-
240
VAC

OPERATING
VOLTAGE

120

BEAM ANGLE

Model No.

Dimension

WR-BT03-16W-01

600*116*35

WR-BT03-32W-01

1200*116*35

ACCESSORIES

ST3.5*25 screws x2
Expansion Plug x2
Clips x1

Model No.

Total
Power

Total Light
Output

BOX size(mm)

Master CTN
QTY

Carton
Size(cm)

WR-BT03-16W-01

16W

1280LM

610*125*42

10

63*23*28

WR-BT03-32W-01

32W

2560LM

1210*125*42

10

123*23*28

SLIM BATTEN LIGHT-BT06



LED BT SERIES



2000lm



4000lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- CENTRAL HOLE FOR WIRE
- NO CLIPS, EASY to be mounted directly
- 3CCT DIP on Switch
- SLIM WIDTH OF ONLY 75MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



CCT3



BEAM ANGLE

Model No.	Dimension
WR-BT06-20W-01-CCT	610*75*32
WR-BT06-40W-01-CCT	1210*75*32

ACCESSORIES

ST3.5*25 screws x2
Expansion Plug x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT06-20W-01-CCT	20W	2000LM	605*85*37	10	61.5*18.5*21.5
WR-BT06-40W-01-CCT	40W	4000LM	1210*85*37	10	122.5*18.5*21.5

SLIM BATTEN LIGHT-BT09



LED BT SERIES



16W

1230lm



32W

2530lm



CONSTRUCTION:

- White coloured Full PLASTIC body

FEATURES:

- ECO EDITION
- RECESSED MOUNTED
- SLIM WIDTH OF ONLY 150MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE

Model No.	Dimension
WR-BT09-18W-01	600*150*30
WR-BT09-36W-01	1200*150*30

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x1

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT09-18W-01	16W	1230LM	610*160*39	10	63*21.5*35
WR-BT09-36W-01	32W	2530LM	1210*160*39	10	123*21.5*35

SLIM BATTEN LIGHT-BT12



LED BT SERIES



2000lm



4000lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- 3CCT DIP on Switch
- Multi-Wattage
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 75MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



CCT3



BEAM ANGLE



MULTI-WATTAGE

Model No.	Dimension
WR-BT12-20P-01-CCT	610*75*22
WR-BT12-40P-01-CCT	1210*75*22

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT12-20P-01-CCT	20W	2000LM	620*84*35	10	63.5*18.2*20.5
WR-BT12-40P-01-CCT	40W	4000LM	1220*84*35	10	123.5*18.2*20.5

SLIM BATTEN LIGHT-BT13



LED BT SERIES



2000lm



4000lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- 3CCT DIP on Switch
- Multi-Wattage
- EASY INSTALLATION
- SLIM WIDTH OF ONLY 75MM
- 1 Meter Length VDE/SAA CORD and PLUG




WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



CCT3



BEAM ANGLE



MULTI-WATTAGE

Model No.	Dimension
WR-BT13-20P-01-CCT	610*75*22
WR-BT13-40P-01-CCT	1210*75*22

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- Clips x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT13-20P-01-CCT	20W	2000LM	635*84*35	10	66*18.2*20.5
WR-BT13-40P-01-CCT	40W	4000LM	1235*84*35	10	126*18.2*20.5

SLIM BATTEN LIGHT-BT14



LED BT SERIES



2000lm



4000lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- CENTRAL HOLE FOR WIRE
- NO CLIPS, EASY to be mounted directly
- Multi-Wattage
- 3CCT DIP on Switch
- SLIM WIDTH OF ONLY 75MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



CCT3



BEAM ANGLE



MULTI-WATTAGE

Model No.	Dimension
WR-BT14-20P-01-CCT	610*75*32
WR-BT14-40P-01-CCT	1210*75*32

ACCESSORIES

ST3.5*25 screws x2
Expansion Plug x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT14-20P-01-CCT	20W	2000LM	620*85*37	10	63.5*18.5*21.5
WR-BT14-40P-01-CCT	40W	4000LM	1220*85*37	10	123.5*18.5*21.5

SLIM BATTEN LIGHT-BT15



LED BT SERIES



1900lm



3800lm



CONSTRUCTION:

- White coated Aluminum and PC diffuser

FEATURES:

- CENTRAL HOLE FOR WIRE
- NO CLIPS, EASY to be mounted directly
- Multi-Wattage
- 3CCT DIP on Switch
- SLIM WIDTH OF 122MM



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



CCT3



BEAM ANGLE



MULTI-WATTAGE

Model No.	Dimension
WR-BT15-20P-01-CCT	610*122*35
WR-BT15-40P-01-CCT	1210*122*35

ACCESSORIES

ST3.5*25 screws x2
Expansion Plug x2

Model No.	Total Power	Total Light Output	BOX size(mm)	Master CTN QTY	Carton Size(cm)
WR-BT15-20P-01-CCT	20W	1900LM	620*130*45	10	63.5*27.5*25.5
WR-BT15-40P-01-CCT	40W	3800LM	1220*130*45	10	123.5*27.5*25.5

CEILING LIGHT-CL05



LED CL SERIES

12W

18W

24W

ULTRA-THIN CEILING LIGHT

960lm /1400lm /1900lm



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser
- Safety Screw by side

FEATURES:

- Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)
- Impact resistance: IK03
- PA08 Terminal Block Inside
- CCT3 Dip on switch
- High frequency sensor for daylight and motion detection
- Wide operating ambient temperature range of -20°C to 40 °C

3

YRS

WARRANTY

30,000

HRS

RATED HOURS

IP20

IP44

IP RATING

220~240
VAC

OPERATING
VOLTAGE

3000K
4000K
6500K

CCT3



BEAM ANGLE



SAFE CLASS

DIMENSIONS

Diameter

Height

WR-CL05-12W-01

Ø260

64

WR-CL05-18W-01

Ø330

66

WR-CL05-24W-01

Ø380

66

ACCESSORIES

Screw

3pcs M6*25mm

Screw

2pcs MXX



Multiple functions available:



tuya[®]

CEILING LIGHT-CL05

LED CL SERIES



12W

18W

24W

Standard	WR-CL05-12W-01	WR-CL05-18W-01	WR-CL05-24W-01
CCT	WR-CL05-12W-01-CCT	WR-CL05-18W-01-CCT	WR-CL05-24W-01-CCT
Mircowave Sensor	--	WR-CL05M-18W-01-CCT	WR-CL05M-24W-01-CCT

Total Power (W):	12	18	24
------------------	----	----	----

Total Light Output (lm):	960	1400	1900
--------------------------	-----	------	------

Efficacy (lm/cctW):	70	70	70
---------------------	----	----	----

Beam Angel (deg):	120	120	120
-------------------	-----	-----	-----

Lux at 1M (lux):

CRI (Ra):	80, sdc<6	80, sdc<6	80, sdc<6
-----------	-----------	-----------	-----------

CCT (K):	4000K 3000/4000/6500K	4000K 3000/4000/6500K	4000K 3000/4000/6500K
----------	--------------------------	--------------------------	--------------------------

Power Factor (PF):	>0.5	>0.5	>0.5
--------------------	------	------	------

BOX Qty:	6	6	6
----------	---	---	---

Weight (Kg):	3.2	5.7	7.2
--------------	-----	-----	-----

Carton Size(mm):	435*285*295	480*375*385	530*445*455
------------------	-------------	-------------	-------------

CTN (CBM)	0.0366	0.0693	0.1073
-----------	--------	--------	--------

Microwave sensor details:

Detection Range:	5M
Adjustable time delay:	5s, 30s, 90s, 3min, 20min, 30min
Adjustable lux settings:	2lux, 10lux, 30lux, 50lux, Disable
Mounting height:	2.5~6m



E-mail: sale@cnblm.com

CEILING LIGHT-CL05



LED CL SERIES

12W

18W

24W

DIAMOND CEILING LIGHT

1440lm /1920lm /2880lm



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser
- Safety Screw by side

FEATURES:

- Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)
- Impact resistance: IK03
- PA10 Terminal Block Inside
- CCT3 Dip on switch
- High frequency sensor for daylight and motion detection
- Wide operating ambient temperature range of -20°C to 40 °C

3

YRS

WARRANTY

30,000

HRS

RATED HOURS

IP20
IP44

IP RATING

220~240
VAC

OPERATING
VOLTAGE

3000K
4000K
6500K

CCT3



BEAM ANGLE



SAFE CLASS

DIMENSIONS

Diameter

Height

WR-CL05-18W-21

Ø362

88

WR-CL05-24W-21

Ø405

75

WR-CL05-36W-21

Ø560

80

ACCESSORIES

Screw

3pcs M6*25mm

Screw

2pcs MXX

Multiple functions available:



tuya[®]

CEILING LIGHT-CL05

LED CL SERIES



18W

24W

36W

	18W	24W	36W
Standard	WR-CL05-18W-21	WR-CL05-24W-21	WR-CL05-36W-21
CCT	WR-CL05-18W-21-CCT	WR-CL05-24W-21-CCT	WR-CL05-24W-21-CCT
Mircowave Sensor	WR-CL05-18P-21-CCT	WR-CL05-24P-21-CCT	WR-CL05-24P-21-CCT
Total Power (W):	18	24	24
Total Light Output (lm):	1440	1920	2880
Efficacy (lm/cctW):	80	80	80
Beam Angel (deg):	120	120	120
Lux at 1M (lux):			
CRI (Ra):	80, sdc<6	80, sdc<6	80, sdc<6
CCT (K):	4000K 3000/4000/5000K	4000K 3000/4000/5000K	4000K 3000/4000/5000K
Power Factor (PF):	>0.5	>0.5	>0.5
BOX Qty:	6	6	6
Weight (Kg):	/	8.2	12.2
Carton Size(mm):	/	515*455*455	525*610*620
CTN (CBM)	/	0.1066	0.1986

Microwave sensor details:

Detection Range:	5M
Adjustable time delay:	5s, 30s, 90s, 3min, 20min, 30min
Adjustable lux settings:	2lux, 10lux, 30lux, 50lux, Disable
Mounting height:	2.5~6m

MUSHROOM FLUSH MOUNT



LED NA-CL SERIES



1050lm

1450lm

1750lm



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN01-15W/15P	Φ10.3*3.4	Φ260*87mm
WR-CLN01-21W/15P	Φ13*3.6	Φ329*92.5mm
WR-CLN01-25W/15P	Φ15*4.1	Φ380*103mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-CLN01-15W	10"	15	1050	5CCT	80/90
WR-CLN01-21W	13"	21	1450	5CCT	80/90
WR-CLN01-25W	15"	25	1750	5CCT	80/90
WR-CLN01-15P	10"	10/12/15	700/840/1050	5CCT+3WATTAGE	80/90
WR-CLN01-21P	13"	15/18/21	1050/1250/1450	5CCT+3WATTAGE	80/90
WR-CLN01-25P	15"	21/23/25	1450/1600/1750	5CCT+3WATTAGE	80/90

DOUBLE RING FLUSH MOUNT



LED NA-CL SERIES

15W

21W

25W

32W

850lm

1250lm

1550lm

2200lm



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F

5

YRS

WARRANTY

50,000
HRS

RATED HOURS

DAMP
PROOF

IP RATING

120
VAC

OPERATING
VOLTAGE

108

BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.

Dimension (inch)

Dimension (mm)

WR-CLN02-15W/15P

Φ12*2.4

Φ305*60.4mm

WR-CLN02-21W/21P

Φ14*2.4

Φ355*60.9mm

WR-CLN02-25W/25P

Φ16*2.6

Φ405*65.5mm

WR-CLN02-32W/32P

Φ18*2.6

Φ456*65.4mm

Model No.

Size

Total Power
(W)

Total Light Output
(LM) (White)

CCT

CRI

WR-CLN02-15W

12"

15

850

5CCT

80/90

WR-CLN02-21W

14"

21

1250

5CCT

80/90

WR-CLN02-25W

16"

25

1550

5CCT

80/90

WR-CLN02-32W

18"

32

2200

5CCT

80/90

WR-CLN02-15P

12"

10/12/15

850

5CCT+3WATTAGE

80/90

WR-CLN02-21P

14"

15/18/21

1250

5CCT+3WATTAGE

80/90

WR-CLN02-25P

16"

21/23/25

1550

5CCT+3WATTAGE

80/90

WR-CLN02-32P

18"

25/28/32

2200

5CCT+3WATTAGE

80/90

E-mail: sale@cnblm.com

SINGLE TRIM FLUSH MOUNT



LED NA-CL SERIES



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN03-15W/15P	Φ10.3*2.5	Φ260*64.5mm
WR-CLN03-21W/21P	Φ13*2.6	Φ331.6*66.5mm
WR-CLN03-25W/25P	Φ15*2.8	Φ381.2*70.5mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)(SLR)	CCT	CRI
WR-CLN03-15W	10"	15	750	5CCT	80/90
WR-CLN03-21W	13"	21	1150	5CCT	80/90
WR-CLN03-25W	15"	25	1450	5CCT	80/90
WR-CLN03-15P	10"	10/12/15	400/540/750	5CCT+3WATTAGE	80/90
WR-CLN03-21P	13"	15/18/21	750/950/1150	5CCT+3WATTAGE	80/90
WR-CLN03-25P	15"	21/23/25	1150/1300/1450	5CCT+3WATTAGE	80/90

DOUBLE TRIMS FLUSH MOUNT



LED NA-CL SERIES



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN04-15W15P	Φ10.3*2.5	Φ260*64.5mm
WR-CLN04-21W/21P	Φ13*2.6	Φ331.6*66.5mm
WR-CLN04-25W/25P	Φ15*2.8	Φ381.2*70.5mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)(SLR)	CCT	CRI
WR-CLN04-15W	10"	15	750	5CCT	80/90
WR-CLN04-21W	13"	21	1150	5CCT	80/90
WR-CLN04-25W	15"	25	1450	5CCT	80/90
WR-CLN04-15P	10"	10/12/15	400/540/750	5CCT+3WATTAGE	80/90
WR-CLN04-21P	13"	15/18/21	750/950/1150	5CCT+3WATTAGE	80/90
WR-CLN04-25P	15"	21/23/25	1150/1300/1450	5CCT+3WATTAGE	80/90

DOUBLE TRIMS FLUSH MOUNT




LED NA-CL SERIES



1050lm

1450lm

1750lm

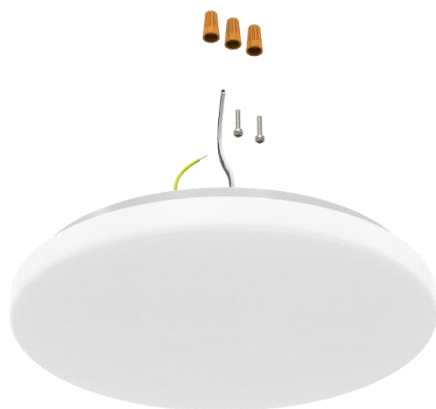

CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN05-15W/15P	Φ10.3*2	Φ260*52mm
WR-CLN05-21W/21P	Φ13*2.3	Φ330*58mm
WR-CLN05-25W/25P	Φ15*2.4	Φ380*60mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-CLN05-15W	10"	15	1050	5CCT	80/90
WR-CLN05-21W	13"	21	1450	5CCT	80/90
WR-CLN05-25W	15"	25	1750	5CCT	80/90
WR-CLN05-15P	10"	10/12/15	700/840/1050	5CCT+3WATTAGE	80/90
WR-CLN05-21P	13"	15/18/21	1050/1250/1450	5CCT+3WATTAGE	80/90
WR-CLN05-25P	15"	21/23/25	1450/1600/1750	5CCT+3WATTAGE	80/90

E SERIES FLUSH MOUNT



LED NA-CL SERIES



CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F




WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN06-15W/15P	Φ10.3*2.4	Φ261*60.5mm
WR-CLN06-21W/21P	Φ13*2.3	Φ330*61.5mm
WR-CLN06-25W/25P	Φ15*2.5	Φ380*63.2mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)(SLR)	CCT	CRI
WR-CLN06-15W	10"	15	1050	5CCT	80/90
WR-CLN06-21W	13"	21	1450	5CCT	80/90
WR-CLN06-25W	15"	25	1750	5CCT	80/90
WR-CLN06-15P	10"	10/12/15	700/840/1050	5CCT+3WATTAGE	80/90
WR-CLN06-21P	13"	15/18/21	1050/1250/1450	5CCT+3WATTAGE	80/90
WR-CLN06-25P	15"	21/23/25	1450/1600/1750	5CCT+3WATTAGE	80/90

SHOP LIGHT –SINGEL TUBE



LED NA-SL SERIES



3200lm



4000lm




5000lm

CONSTRUCTION:

- White coloured polycarbonate body
- Opal polycarbonate diffuser

FEATURES:

- Damp Location
- 2*12" Hanging Chains with Hook
- 7.5" ON/OFF Pull Chains
- Powered by 5ft. 18/2 SPT-2 Cord
- Pro-diffuser providing higher photometric performance than LED tubes and low glare lighting
- Wide operating ambient temperature range of -4°F to 113°F

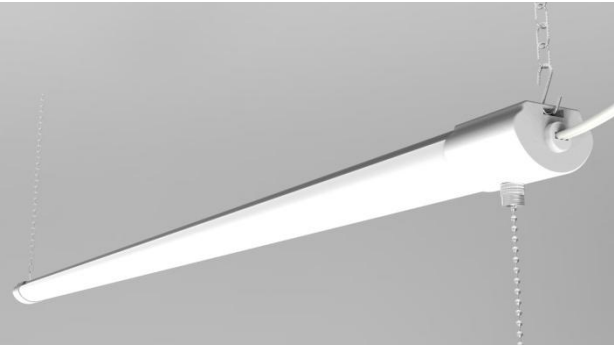

WARRANTY




RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE




SAFE CLASS

Model No.	Dimension
WR-SLN03-32W	2in*46.26in*1.3in 51mm*1175mm*33mm
WR-SLN03-40W	
WR-SLN03-50W	

ACCESSORIES

- ST3.5*25 screws x2
- Expansion Plug x2
- 12" Hanging Chains with Hooks x2

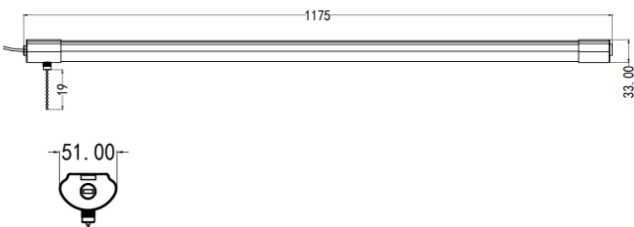

Notes:

4000lm&5000lm Linkable

A maximum of 4&5(200W) units can be linked together, With a maximum distance of 1 foot between each light

SHOP LIGHT –SINGEL TUBE

LED NA-SL SERIES

	3200lm	4000lm	5000lm
	4ft.	4ft.	4ft.
Standard	WR-SLN03-32W	WR-SLN03-40W	WR-SLN03-50W
Total Power (W):	32	40	50
Total Light Output (lm):	3200lm	4000lm	5000lm
Efficacy (lm/cctW):	100	100	100
Beam Angel (deg):	108	108	108
Lux at 1M (lux):	790	990	1200
CRI (Ra):	80	80	80
CCT (K):	4000	4000	4000
Power Factor (PF):	0.9	0.9	0.9
Linkable Number	None	6	6
BOX Qty:	10	10	10
Weight (Kg):	6.9	6.9	6.9
Carton Size(mm):	1240*270*140	1240*270*140	1240*270*140
CTN (CBM)	0.047	0.047	0.047



RECESSED RETROFIT SMOOTH&BAFFLE





LED NA-DL SERIES



900lm

1250lm

1600lm

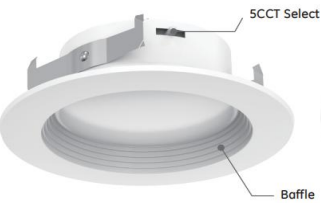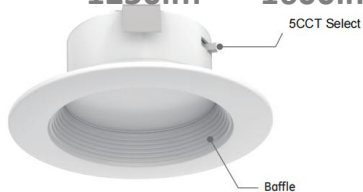

CONSTRUCTION:

- White coloured Aluminum body
- Opal polycarbonate diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT

Model No.	Dimension (inch)	Dimension (mm)
WR-DLN01-8W	Φ4*1.59	Φ106*40.4mm
WR-DLN01-12W	Φ5.5*1.87	Φ140*47.5mm
WR-DLN01-15W	Φ7.3*2	Φ186*53.1mm




Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-DLN01-8W	3"	8	500	5CCT	80/90
WR-DLN01-12W	4"	12	850	5CCT	80/90
WR-DLN01-15W	6"	15	1050	5CCT	80/90

CANLESS RETROFIT WITH EXTERNAL J-BOX



LED NA-DL SERIES

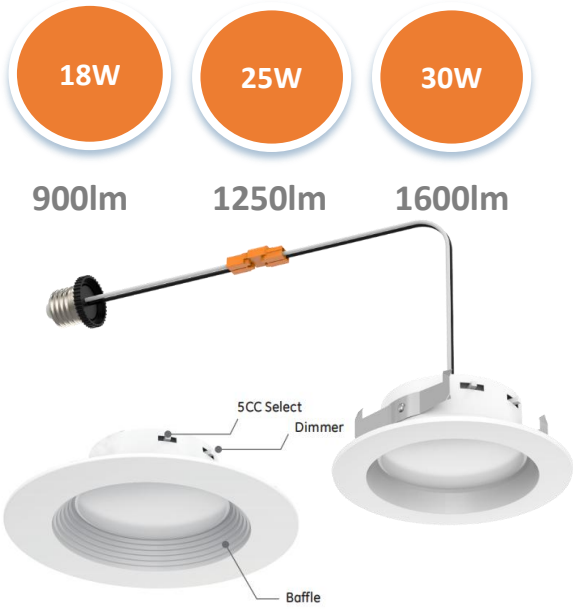

CONSTRUCTION:

- White coloured Aluminum body
- Opal polycarbonate diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F

5
YRS
WARRANTY

50,000
HRS
RATED HOURS

DAMP
PROOF
IP RATING

120
VAC
OPERATING VOLTAGE

108
BEAM ANGLE

SAFE CLASS

SELECTABLE
CCT

MULTI
WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-DLN01-12P	Φ5.5*1.87	Φ140*47.5mm
WR-DLN01-15P	Φ7.3*2	Φ186*53.1mm



Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-DLN01-12P	4"	12	600/750/850	5CCT+3WATTAGE	80/90
WR-DLN01-15P	6"	15	750/850/1050	5CCT+3WATTAGE	80/90

CANLESS RETROFIT WITH EXTERNAL J-BOX



LED NA-DL SERIES



500lm

850lm

1050lm



CONSTRUCTION:

- White coloured Aluminum body
- Opal polycarbonate diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-DLN02-8W	Φ4.17*1.65	Φ106*42.1mm
WR-DLN02-12W/12P	Φ5.5*1.9	Φ140*49.6mm
WR-DLN02-15W/15P	Φ7.3*2	Φ186*52.2mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-DLN02-8W	3"	8	500	5CCT	80/90
WR-DLN02-12W	4"	12	850	5CCT	80/90
WR-DLN02-15W	6"	15	1050	5CCT	80/90
WR-DLN02-12P	4"	8/10/12	600/750/850	5CCT+3WATTAGE	80/90
WR-DLN02-15P	6"	10/12/15	750/850/1050	5CCT+3WATTAGE	80/90

LED NA-DL SERIES



500lm

850lm

1050lm



CONSTRUCTION:

- White coloured Aluminum body
- Opal polycarbonate diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F




WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-DLN03-8W	Φ3.97*2.85	Φ101*72.5mm
WR-DLN03-12W/12P	Φ5.5*3.2	Φ140*82.5mm
WR-DLN03-15W/15P	Φ7.32*3.38	Φ186*86mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-DLN03-8W	3"	8	500	5CCT	80/90
WR-DLN03-12W	4"	12	850	5CCT	80/90
WR-DLN03-15W	6"	15	1050	5CCT	80/90
WR-DLN03-12P	4"	8/10/12	600/750/850	5CCT+3WATTAGE	80/90
WR-DLN03-15P	6"	10/12/15	750/850/1050	5CCT+3WATTAGE	80/90

SLIM PANEL- CIRCLE



LED NA-PL SERIES

8W

500lm

12W

800lm

16W

1200lm

20W

1600lm

27W

2000lm



CONSTRUCTION:

- White coloured Aluminum body
- Opal PMMA diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- Wide operating ambient temperature range of -4°F to 113°F

5

YRS

WARRANTY

50,000

HRS

RATED HOURS

DAMP
PROOF

IP RATING

120
VAC

OPERATING
VOLTAGE

108

BEAM ANGLE

SAFE CLASS

SELECTABLE
CCT

5CCT

Model No.	Dimension (inch)	Dimension (mm)
WR-PLN01-12W	Φ5.04*0.93	Φ128*23.5mm
WR-PLN01-16W	Φ6.88*0.77	Φ174.7*19.6mm
WR-PLN01-20W	Φ8.84*0.78	Φ224.6*19.7mm
WR-PLN01-27W	Φ11.8*0.83	Φ300*21mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-PLN01-12W	4"	12	850	5CCT	80/90
WR-PLN01-16W	6"	16	1200	5CCT	80/90
WR-PLN01-20W	8"	20	1600	5CCT	80/90
WR-PLN02-27W	12"	27	2000	5CCT	80/90

SLIM PANEL- CIRCLE



LED NA-PL SERIES

12W

16W

20W

27W

800lm

1200lm

1600lm

2000lm



CONSTRUCTION:

- White coloured Aluminum body
- Opal PMMA diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F

5

YRS

WARRANTY

50,000
HRS

RATED HOURS

DAMP
PROOF

IP RATING

120
VAC

OPERATING
VOLTAGE

108

BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-PLN01R-12P	Φ5.04*0.93	Φ128*23.5mm
WR-PLN01R-16P	Φ6.88*0.77	Φ174.7*19.6mm
WR-PLN01R-20P	Φ8.84*0.78	Φ224.6*19.7mm
WR-PLN01R-27P	Φ11.8*0.83	Φ300*21mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-PLN01R-12P	4"	8/10/12	600/700/800	5CCT+3WATTAGE	80/90
WR-PLN01R-16P	6"	12/14/16	800/1000/1200	5CCT+3WATTAGE	80/90
WR-PLN01R-20P	8"	16/18/20	1200/1400/1600	5CCT+3WATTAGE	80/90
WR-DLN01R-27P	12"	21/24/27	1600/1800/2000	5CCT+3WATTAGE	80/90

LED NA-PL SERIES



12W

850lm



16W

1200lm



CONSTRUCTION:

- White coloured Aluminum body
- Opal PMMA diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.

Dimension (inch)

Dimension (mm)

WR-PLN01S-12W/12P

4.7*4.7*0.9

119.6*119.6*22.7mm

WR-PLN01S-16W/16P

6.8*6.8*0.9

174.5*174.5*22.3mm

Model No.

Size

Total Power (W)

Total Light Output (LM) (White)

CCT

CRI

WR-PLN01S-12W

4"

12

850

5CCT

80/90

WR-PLN01S-16W

6"

16

1200

5CCT

80/90

WR-PLN01S-12P

4"

8/10/12

600/700/800

5CCT+3WATTAGE

80/90

WR-PLN01S-16P

6"

12/14/16

800/1000/1200

5CCT+3WATTAGE

80/90

DISK LIGHT WITH 2 WAY INSTALLATION



LED NA-DK SERIES



850lm



1050lm



CONSTRUCTION:

- White coloured Aluminum body
- Opal PMMA diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT


Model No.	Dimension (inch)	Dimension (mm)
WR-DKN01-12W-01	Φ5.9*0.95	Φ150*24.2mm
WR-DKN01-12W-02	Φ5.9*0.95	Φ150*24.2mm
WR-DKN01-15W-01	Φ7.3*1	Φ185*25.4mm
WR-DKN01-15W-02	Φ7.3*1	Φ185*25.4mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-DKN01-12W-01	4"	12	850	5CCT	80/90
WR-DKN01-12W-02	4"	12	850	5CCT	80/90
WR-DKN01-15W-01	6"	15	1050	5CCT	80/90
WR-DKN01-15W-02	6"	15	1050	5CCT	80/90

DISK LIGHT WITH 2 WAY INSTALLATION



LED NA-DK SERIES

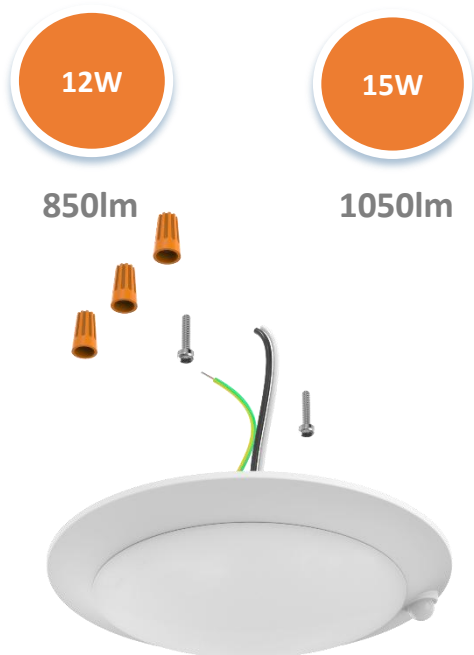

CONSTRUCTION:

- White coloured Aluminum body
- Opal PMMA diffuser

FEATURES:

- Damp Location
- 5CCT SELECTABLE
- PIR Motion Sensor
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT

Model No.	Dimension (inch)	Dimension (mm)
WR-DKN01-12W-01P	Φ5.9*0.95	Φ150*24.2mm
WR-DKN01-12W-02P	Φ5.9*0.95	Φ150*24.2mm
WR-DKN01-15W-01P	Φ7.3*1	Φ185*25.4mm
WR-DKN01-15W-02P	Φ7.3*1	Φ185*25.4mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-DKN01-12W-01P	4"	12	850	5CCT	80/90
WR-DKN01-12W-02P	4"	12	850	5CCT	80/90
WR-DKN01-15W-01P	6"	15	1050	5CCT	80/90
WR-DKN01-15W-02P	6"	15	1050	5CCT	80/90