

DOUBLE TRIMS FLUSH MOUNT




LED NA-CL SERIES



1050lm

1450lm

1750lm

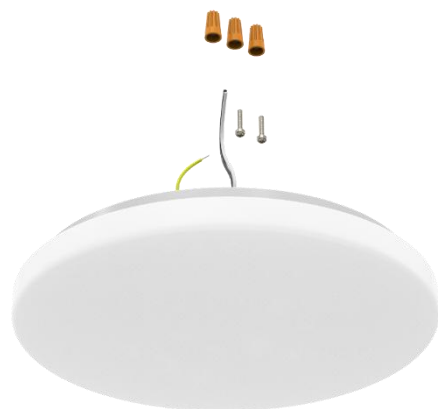

CONSTRUCTION:

- White coloured Metal body
- Opal PMMA diffuser

FEATURES:

- DAMP Location
- 5CCT Selectable
- 3 MULTI-Wattage Selectable
- Wide operating ambient temperature range of -4°F to 113°F



WARRANTY



RATED HOURS



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



SAFE CLASS



5CCT



MULTI-WATTAGE

Model No.	Dimension (inch)	Dimension (mm)
WR-CLN05-15W/15P	Φ10.3*2	Φ260*52mm
WR-CLN05-21W/21P	Φ13*2.3	Φ330*58mm
WR-CLN05-25W/25P	Φ15*2.4	Φ380*60mm

Model No.	Size	Total Power (W)	Total Light Output (LM) (White)	CCT	CRI
WR-CLN05-15W	10"	15	1050	5CCT	80/90
WR-CLN05-21W	13"	21	1450	5CCT	80/90
WR-CLN05-25W	15"	25	1750	5CCT	80/90
WR-CLN05-15P	10"	10/12/15	700/840/1050	5CCT+3WATTAGE	80/90
WR-CLN05-21P	13"	15/18/21	1050/1250/1450	5CCT+3WATTAGE	80/90
WR-CLN05-25P	15"	21/23/25	1450/1600/1750	5CCT+3WATTAGE	80/90